



DC RAPID SHUTDOWN SWITCH

Technology
Connects human and nature

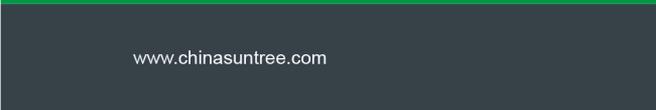

www.chinasuntree.com

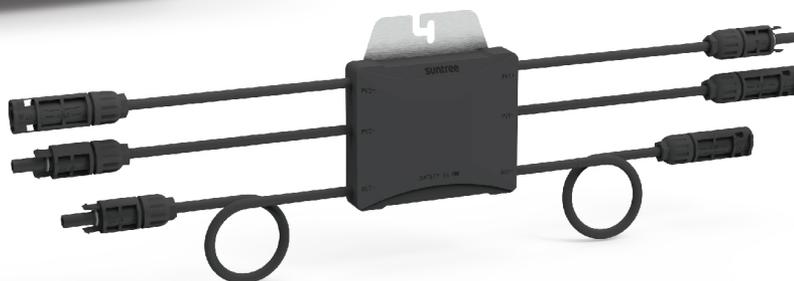


MODEL AND SIGNIFICANCE

S	-	ISO	/	40	-	N
Enterprise code		Design Code		Max voltage 1500V		Max current 40A
						Number of strings 1,2,3,4,5,6,7,8,9,10

FEATURE

- 1~10 STRINGS AVAILABLE
- APP REMOTE CONTROL
- UP TO 40A
- SHUTDOWN FEEDBACK SIGNAL
- UP TO 1500V
- AUTO SHUTDOWN EXCEEDING 70°C
- CE CERTIFICATION
- 10000 MECHANICAL LIFE CYCLES
- IP65 PROTECTION & ANTI UV
- LSOLATOR WITH CE,CB,TUV,SA

WIRING DIAGRAM

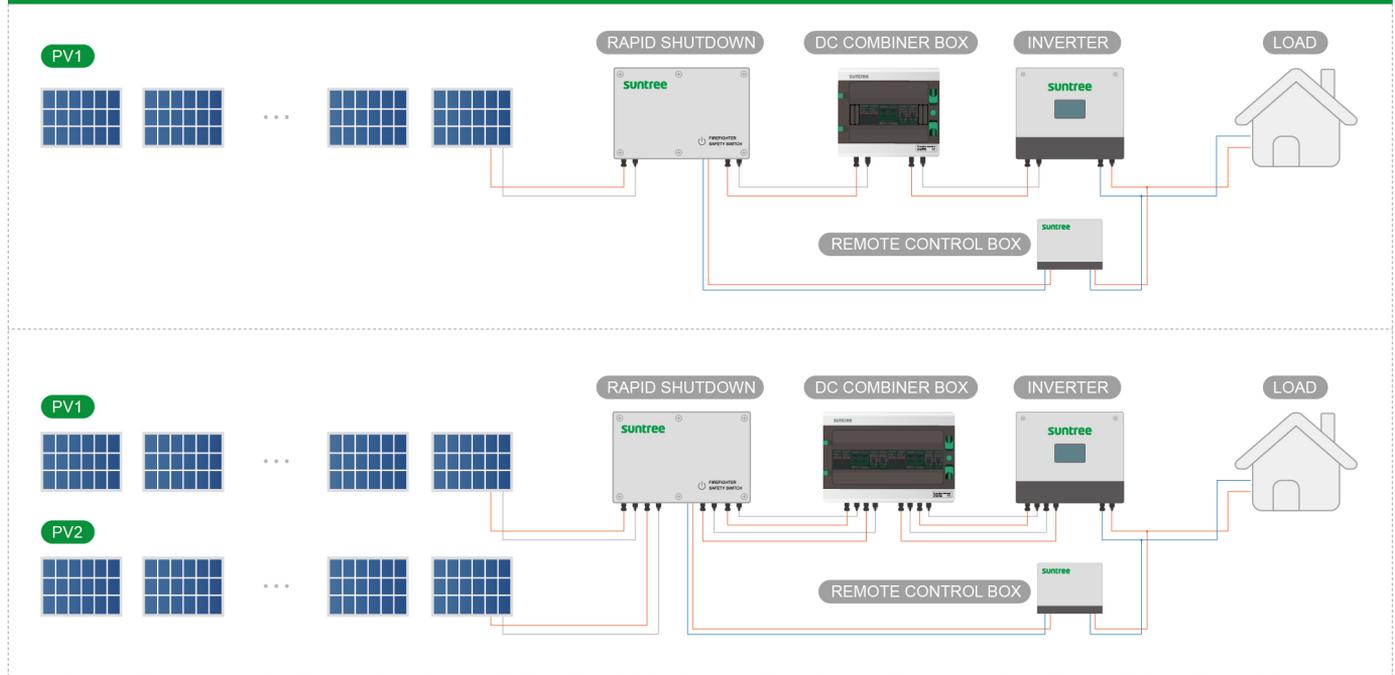

RAPID SHUTDOWN

- S-ISOH-40-1
- S-ISOH-40-2

ELECTRICAL TECHNICAL REFERENCE

Model	S-ISOH-40-1	S-ISOH-40-2
<i>MAIN LOOP PARAMETERS</i>		
Number of strings	1	2
Max DC voltage	1500 Vdc	
Max DC current	40 A	
Parameters	1500V26A,1000V40A,600V40A	
DC connector	MC4	
<i>CONTROL LOOP PARAMETERS</i>		
Power supply type	AC single phase	
Nominal voltage	230Vac	
Operating voltage	100-270 Vac	
Nominal frequency	50Hz	
Operating frequency	47-53 Hz	
Nominal current	30mA	
Max current	300mA	
AC connector	Plug-in	
<i>PRODUCT PARAMETERS</i>		
Protection degree	IP65	
Protection level	Class II	
Certification	CE	
Switch according to	EN 60947-3	
Number of operations	>10000	
N. of operations under load	>1500	
Operating temperature	-20°C~ 70°C	
Temperature sensor trigger	70°C	
Warranty	5 years	
Dimensions (L*W*H)	265 * 280 * 115	
Weight	2950 g	3130 g


MODEL AND SIGNIFICANCE

S	-	ISO	/	40	-	N
Enterprise code		Design Code		Max current 40A		Number of strings 1,2,3,4,5,6,7,8,9,10

FEATURE

- 1~10 STRINGS AVAILABLE
- UP TO 40A
- UP TO 1500V
- CE CERTIFICATION
- IP65 PROTECTION & ANTI UV
- APP REMOTE CONTROL
- SHUTDOWN FEEDBACK SIGNAL
- AUTO SHUTDOWN EXCEEDING 70°C
- 10000 MECHANICAL LIFE CYCLES
- LSOLATOR WITH CE,CB,TUV,SAA

WIRING DIAGRAM

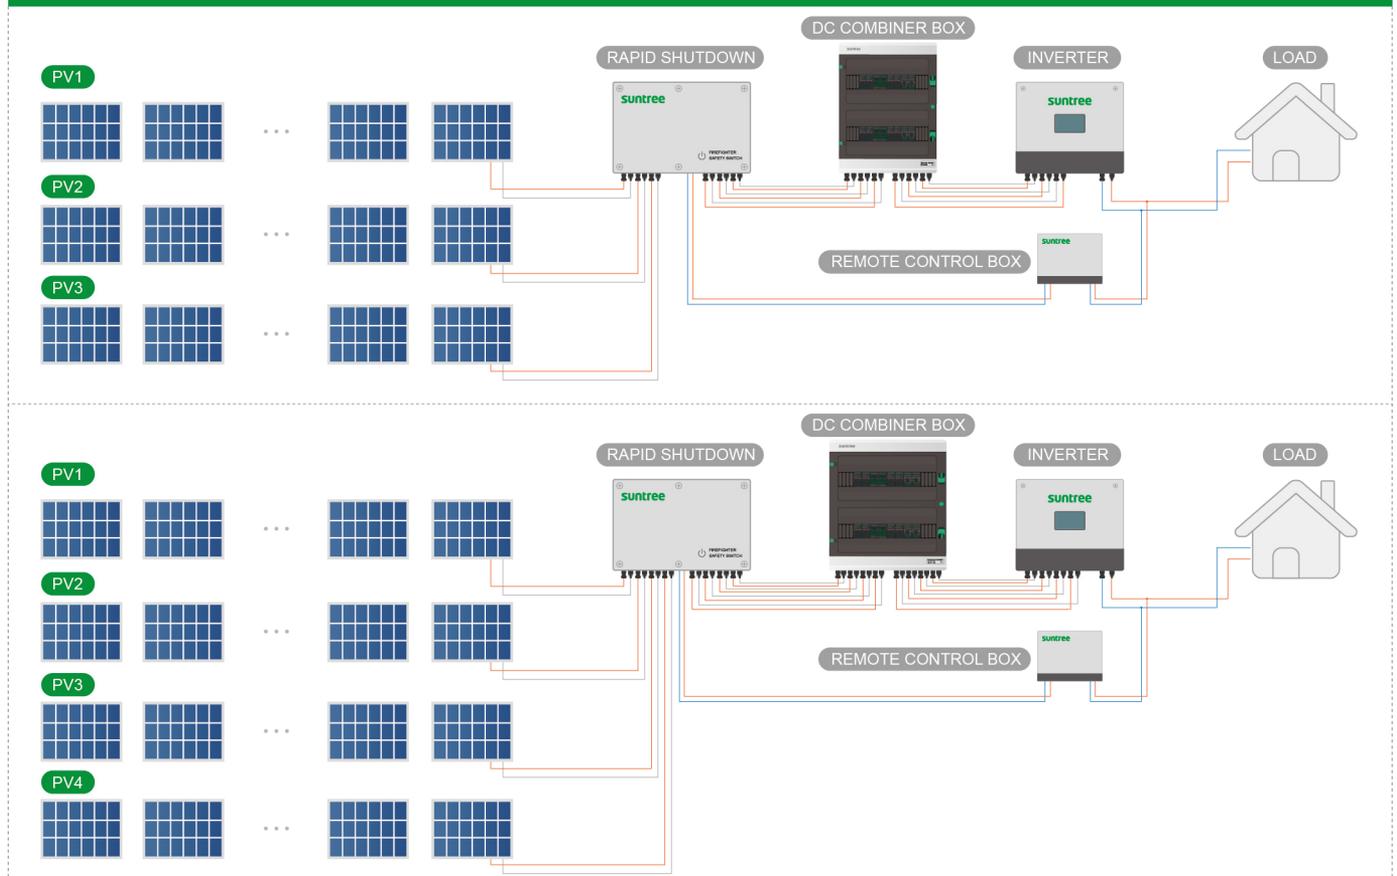

RAPID SHUTDOWN

- S-ISOH-40-3
- S-ISOH-40-4

ELECTRICAL TECHNICAL REFERENCE

Model	S-ISOH-40-3	S-ISOH-40-4
<i>MAIN LOOP PARAMETERS</i>		
Number of strings	3	4
Max DC voltage	1500 Vdc	
Max DC current	40 A	
Parameters	1500V26A,1000V40A,600V40A	
DC connector	MC4	
<i>CONTROL LOOP PARAMETERS</i>		
Power supply type	AC single phase	
Nominal voltage	230Vac	
Operating voltage	100-270 Vac	
Nominal frequency	50Hz	
Operating frequency	47-53 Hz	
Nominal current	30mA	
Max current	300mA	
AC connector	Plug-in	
<i>PRODUCT PARAMETERS</i>		
Protection degree	IP65	
Protection level	Class II	
Certification	CE	
Switch according to	EN 60947-3	
Number of operations	>10000	
N. of operations under load	>1500	
Operating temperature	-20°C~ 70°C	
Temperature sensor trigger	70°C	
Warranty	5 years	
Dimensions (L*W*H)	300 * 280 *115	350 * 280 *115
Weight	3440 g	3950 g

ELECTRICAL TECHNICAL REFERENCE

Model	S-ISOH-40-5	S-ISOH-40-6
<i>MAIN LOOP PARAMETERS</i>		
Number of strings	5	6
Max DC voltage	1500 Vdc	
Max DC current	40 A	
Parameters	1500V26A,1000V40A,600V40A	
DC connector	MC4	
<i>CONTROL LOOP PARAMETERS</i>		
Power supply type	AC single phase	
Nominal voltage	230Vac	
Operating voltage	100-270 Vac	
Nominal frequency	50Hz	
Operating frequency	47-53 Hz	
Nominal current	30mA	
Max current	300mA	
AC connector	Plug-in	
<i>PRODUCT PARAMETERS</i>		
Protection degree	IP65	
Protection level	Class II	
Certification	CE	
Switch according to	EN 60947-3	
Number of operations	>10000	
N. of operations under load	>1500	
Operating temperature	-20°C~ 70°C	
Temperature sensor trigger	70°C	
Warranty	5 years	
Dimensions (L*W*H)	348 * 270 *137	348 * 270 *137
Weight	4700 g	5200 g


ELECTRICAL TECHNICAL REFERENCE

Model	S-ISOH-40-7	S-ISOH-40-8
<i>MAIN LOOP PARAMETERS</i>		
Number of strings	7	8
Max DC voltage	1500 Vdc	
Max DC current	40 A	
Parameters	1500V26A,1000V40A,600V40A	
DC connector	MC4	
<i>CONTROL LOOP PARAMETERS</i>		
Power supply type	AC single phase	
Nominal voltage	230Vac	
Operating voltage	100-270 Vac	
Nominal frequency	50Hz	
Operating frequency	47-53 Hz	
Nominal current	30mA	
Max current	300mA	
AC connector	Plug-in	
<i>PRODUCT PARAMETERS</i>		
Protection degree	IP65	
Protection level	Class II	
Certification	CE	
Switch according to	EN 60947-3	
Number of operations	>10000	
N. of operations under load	>1500	
Operating temperature	-20°C~ 70°C	
Temperature sensor trigger	70°C	
Warranty	5 years	
Dimensions (L*W*H)	348 * 330 *173	348 * 330 *173
Weight	5800 g	6300 g

ELECTRICAL TECHNICAL REFERENCE

Model	S-ISOH-40-9	S-ISOH-40-10
<i>MAIN LOOP PARAMETERS</i>		
Number of strings	9	10
Max DC voltage	1500 Vdc	
Max DC current	40 A	
Parameters	1500V26A,1000V40A,600V40A	
DC connector	MC4	
<i>CONTROL LOOP PARAMETERS</i>		
Power supply type	AC single phase	
Nominal voltage	230Vac	
Operating voltage	100-270 Vac	
Nominal frequency	50Hz	
Operating frequency	47-53 Hz	
Nominal current	30mA	
Max current	300mA	
AC connector	Plug-in	
<i>PRODUCT PARAMETERS</i>		
Protection degree	IP65	
Protection level	Class II	
Certification	CE	
Switch according to	EN 60947-3	
Number of operations	>10000	
N. of operations under load	>1500	
Operating temperature	-20°C~ 70°C	
Temperature sensor trigger	70°C	
Warranty	5 years	
Dimensions (L*W*H)	348 * 330 *195	348 * 330 *195
Weight	6500 g	7000 g

MOUNTING ACCESSORIES

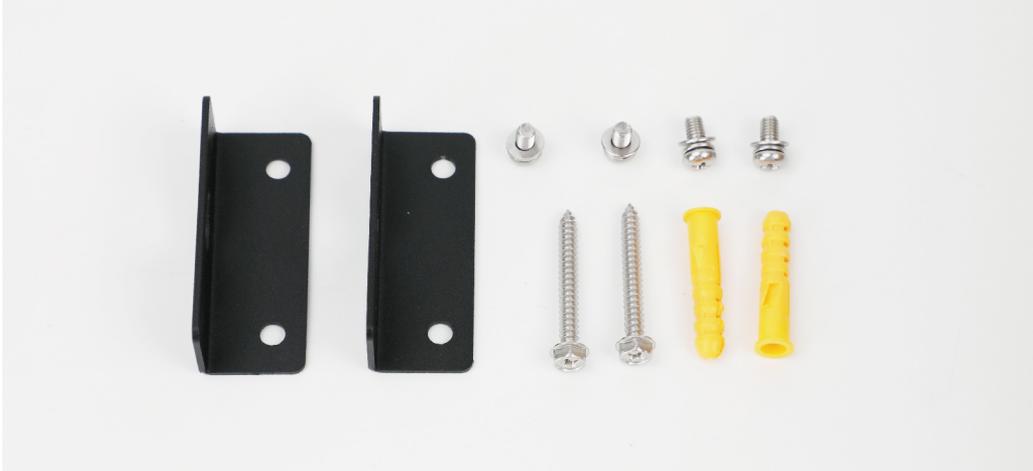

PV CONNECTOR

